



**Brand :** Axor, Germany  
**Name :** One Thermostatic Module for Concealed Installation for 1 function  
**Item Code :** 45711.000  
**Designer :** Edward Barber & Jay Osgerby  
**Color / Finish :** Chrome  
**Dimensions :**



#### Product info:

- Eco-Function: flow rate regulation via lever handle
- depending on volume flow and installation situation approx. 50% flow rate reduction
- 1 function and 1 additional outlet
- comfortable turning on / off of consumers with large Select-paddle
- maximum flow rate at 3 bar: 24 l/min
- flow rate per outlet: 24 l/min
- thermostat cartridge, Start/stop valve to operate the functions
- safety lock at 40° C
- temperature limitation adjustable
- min. operating pressure: 1 bar


#### Add-ons :

- 1 x 45710.180 basic set for thermostatic module

## Technology

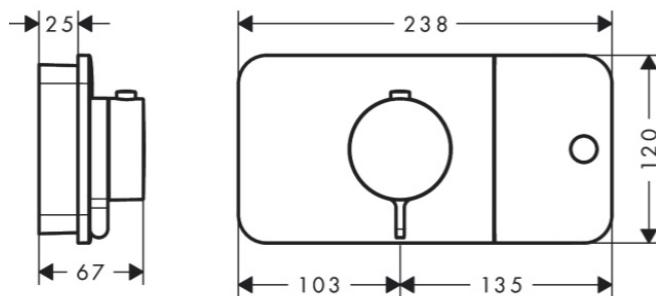

## Flowchart

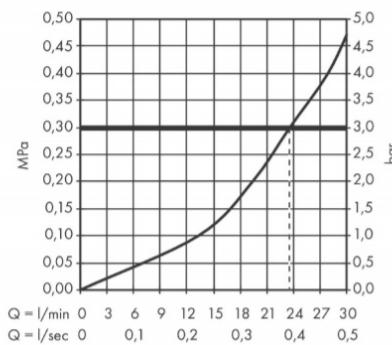

Flushing of pipe must be done before fittings are installed. Failure to do so voids the warranty.

Follow cleaning instructions and avoid using any harmful chemicals.

All information is for reference only. Installation shall always be based on the specs provided with actual delivered items.

For more info, visit [www.kuysen.com](http://www.kuysen.com)