



towels with C/Z folds / wall mounted



DT2106 capacity: 400-600 C/Z towels

material: steel finish: white epoxy











DT2106B

capacity: 400-600 C/Z towels

material: steel

finish: matte black epoxy





DT2106C

capacity: 400-600 C/Z towels

material: AISI 304 stainless steel finish: bright





DT2106CS

capacity: 400-600 C/Z towels

material: AISI 304 stainless steel finish: satin










DT2106 · DT2106B · DT2106C · DT2106CS COMPONENTS AND MATERIALS

- Fully welded structure
- The design of the paper outlet prevents the paper from
- Door fixed to the body with two rivets, allowing it to be swung open for paper replacement
- Front lock with a special key provided for an easy paper replacement
- Content viewer on the front
- Back-plate with multiple slots for easy installation
- Lock with standard Mediclinics key

DT2106 · DT2106B · DT2106C · DT2106CS TECHNICAL SPECIFICATIONS

Body and lid thickness	0.8 mm
Weight (empty)	1.8 Kg
Towels	max. 260 x 100 mm
Towels capacity folded in C/Z	400 - 600 u
Recommended installation height	130-160 cm at lower point
Installation height 🚯	85 - 120 cm at lower point






roll / wall mounted








DT0303 · DT0303C · DT0303CS COMPONENTS AND MATERIALS

- Drainage holes in the lower part to prevent eventual accumulation of water inside the dispenser
- Sliding access door with a recessed grip for opening and closing
- Thermoplastic body for roll of paper towels
- System for optimizing the issue of paper
- Front sliding door which allows it to be mounted under shelves and makes it easy to replenish the towels
- Jagged edge on dispenser to facilitate tearing of paper
- Lock with standard Mediclinics key
- Suitable for food handling establishments


DT0303 · DT0303C · DT0303CS TECHNICAL SPECIFICATIONS

Body and lid thickness	0.8 mm
Weight (empty)	3.1 Kg
Paper reel	max. Ø250 mm
Height of paper roll	270 mm
Recommended installation height	130-160 cm at lower point
Installation height 🚯	85 - 120 cm at lower point

DT0303 · DT0303C · DT0303CS



recessed - wall mounted / roll

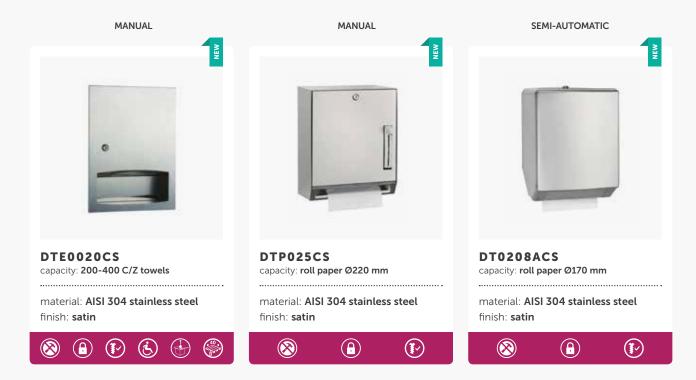

DTE0020CS · DTP025CS · DT0208ACS COMPONENTS AND MATERIALS

- DTE0020CS
- Fully welded structure
- One-piece frame
- Towel tray with bound edging to dispense towels without tearing
- · Lock and special key supplied
- DTP025CS

DTE0020CS

- Operated by means of a lever. According to the lever stroke, paper of 64, 102 or 127 mm
- The design of the paper outlet prevents the paper from tearing
- Automatic transfer mechanism shall dispense towels from stub roll before starting new roll
- Door shall be attached to cabinet at side with a full length multi-staked stainless steel piano hinge

- Front lock with a special key provided permanently affixed to the inside rear panel to illustrate correct paper loading, length preset pin selection and stub roll transfer
- DT0208ACS
- Semi-automatic operation. The user pulls the paper, down tears it off and automatically a new service paper is dispensed
- The cover shall be attached to the back with two pivots and shall be held closed with a tumbler key lock
- Structural assembly of all components shall be of welded construction
- An operation label shall be provided permanently affixed to the inside rear panel to illustrate the correct paper loading, length preset pin selection

DTE0020CS · DTP025CS · DTP0208ACS TECHNICAL SPECIFICATIONS

DT0208ACS

Body and lid thickness	0.8 mm	Body and	l lid thickness	0.8 mm	
Weight (empty)	4.2 Kg	Dispensed paper towel width 205 mm			-
Capacity of folded towels in C/Z	200 - 400 units				
Recommended installation height 115-1	45 cm at lower point				
Installation height 🚷 70 - 1	05 cm at lower point	Installatio	on height 🚯	85 - 120 cm at lower point	
					250 mm
DTP025CS			DTE0020CS	DTP025CS	
Body and lid thickness	0.8 mm	9 <u>0 m</u> m	330 mm ——		
Weight (empty)	4.5 Kg			270 mm	
Main paper roll diameter	max. Ø220 mm	<u>+</u>			372
Secondary paper roll diameter	max. Ø100 mm			405 mm	
Dispensed paper towel width	from 200 to 230 mm	0 mu	.	405	287 mm
Recommended installation height 115-1	45 cm at lower point	36			287 mm
Installation height 70-1	05 cm at lower point	<u> </u>		314 mm	<u>*</u>
				229 mm	

Table

	MODEL	MATERIAL / FINISH				INSTALLATION		
		Steel White Epoxy	Steel Matte Black Epoxy	AISI 304 Stainless steel Bright	AISI 304 Stainless steel Satin	Wall Mounted	Recessed	
	DT2106	•				•		
	DT2106B		•			•		
	DT2106C			•		•		
	DT2106CS				•	•		
	DT0303	•				•		
0 :	DT0303C			•		•		
	DT0303CS				•	•		
Φ	DTE0020CS				•		•	
	DTP025CS				•	•		
	DT0208ACS				•	•		

Table

MODEL	SUITABLE FOR M				≿	PAPER TYPE/CAPACITY				
	Airports, shopping malls and smiliars	Offices, official or- ganizations, schools and similars	Hotels Other accommo- dation	Hospitals and Health Centres fa- cilities ederly care homes and similars	Gyms Sports centres and similars	LOCK WITH KEY	Ø 250 mm	Ø 200 mm	folds 400-600 u	C/Z 200-400 units
DT210	•	•	•	•		•			•	
DT2106	•	•	•	•		•				
DT2106	•	•	•	•	•	•			•	
DT2106C	•	•	•	•	•	•			•	
DT030				•		•	•			
DT0303				•	•	•	•			
DT0303C				•	•	•	•			
DTE0020C		•	•	•	•	•				•
DTP025C	•	•	•	•	•	•		•		
DT0208A	•	•	•	•	•	•		•		